


FLOW RANGE: 75 - 550 GPM

OUTLET SIZE: 4" NPT

NOMINAL DIA. 8"

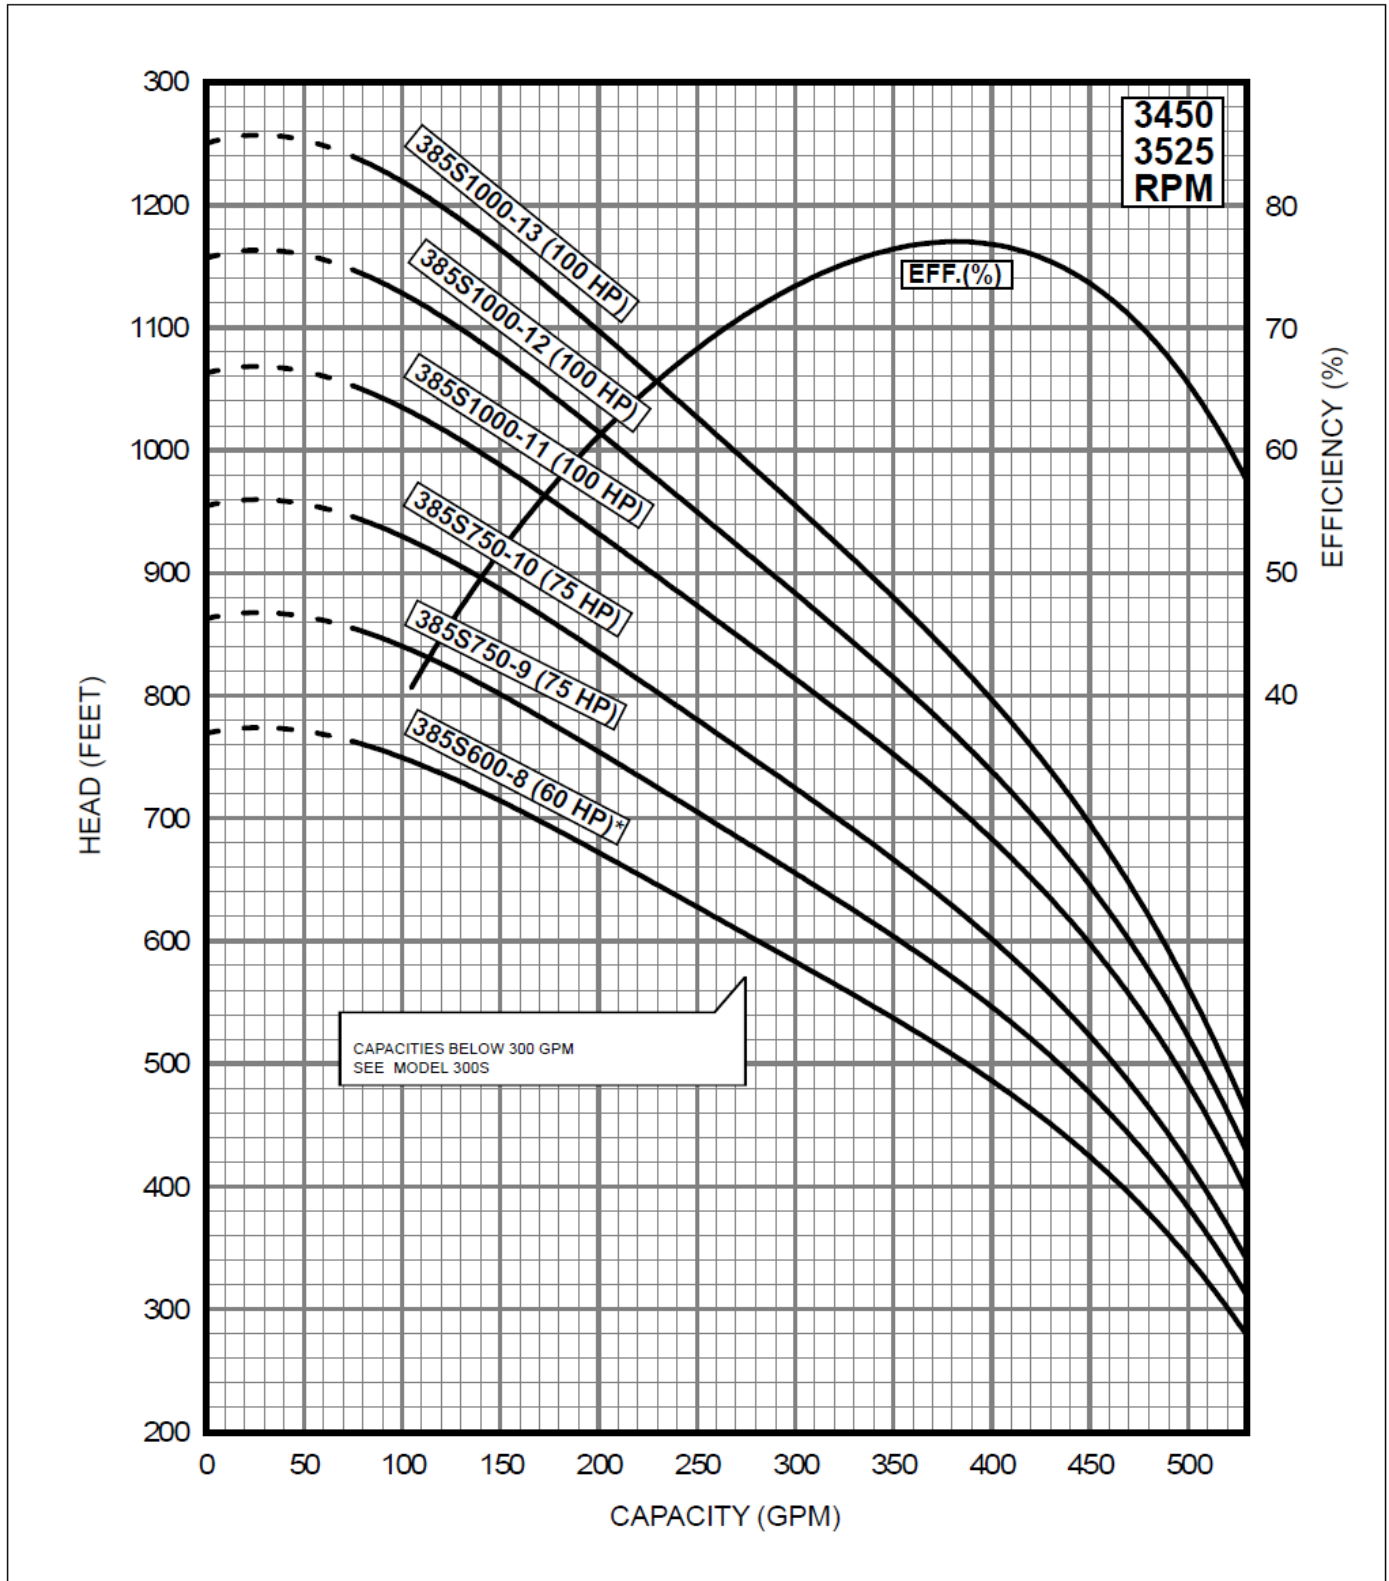

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 6" MOTOR STANDARD, 7.5-60 HP/3450 RPM.
 8" MOTOR STANDARD, 75-100 HP/3525 RPM.

Performance conforms to ISO 9906. 1999 (E) Annex A
 Minimum submergence is 8 feet.

