


FLOW RANGE: 160 - 1080 GPM

OUTLET SIZE: 6" NPT

NOMINAL DIA. 10"

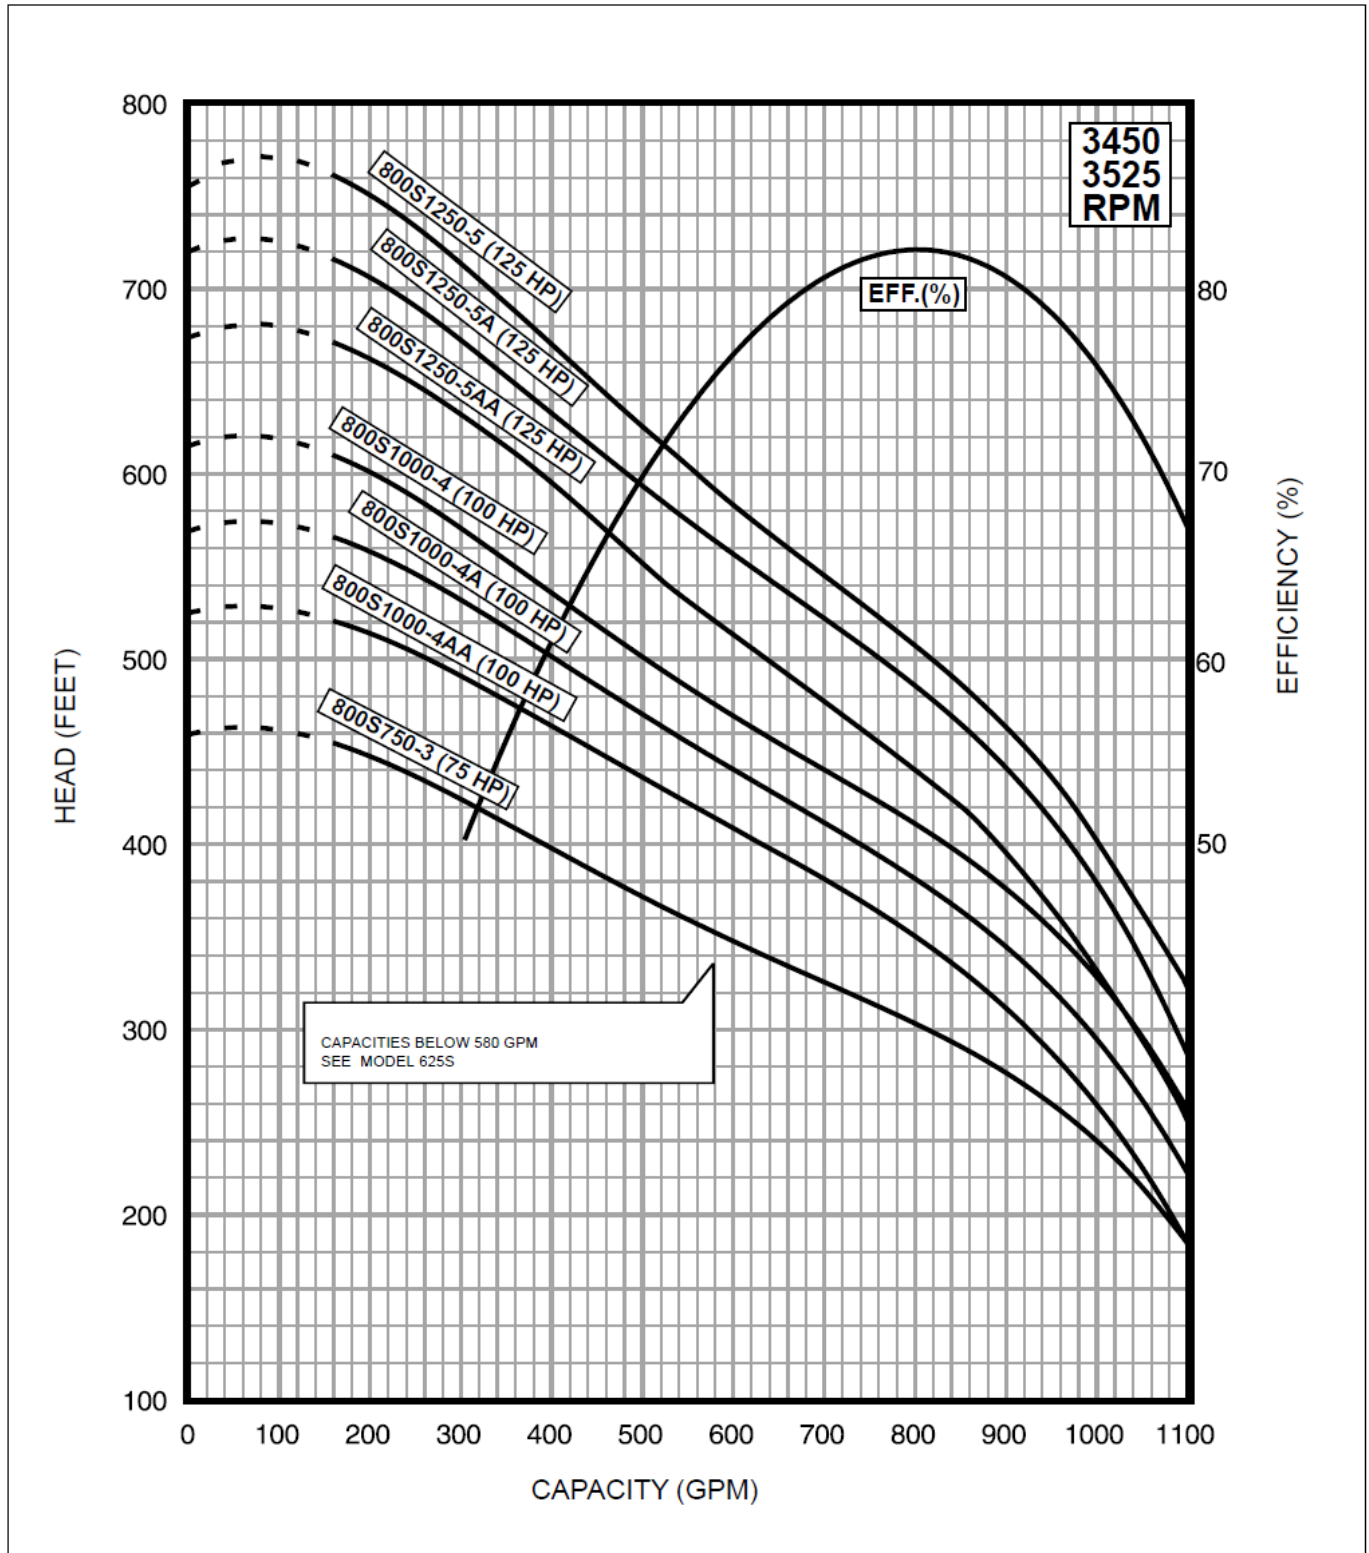

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 20-60 HP/3450 RPM.
8" MOTOR STANDARD 75-125 HP/3525 RPM.

Performance conforms to ISO 9906, 1999 (E) Annex A
Minimum submergence is 10 feet.

