


FLOW RANGE: 18 -118 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

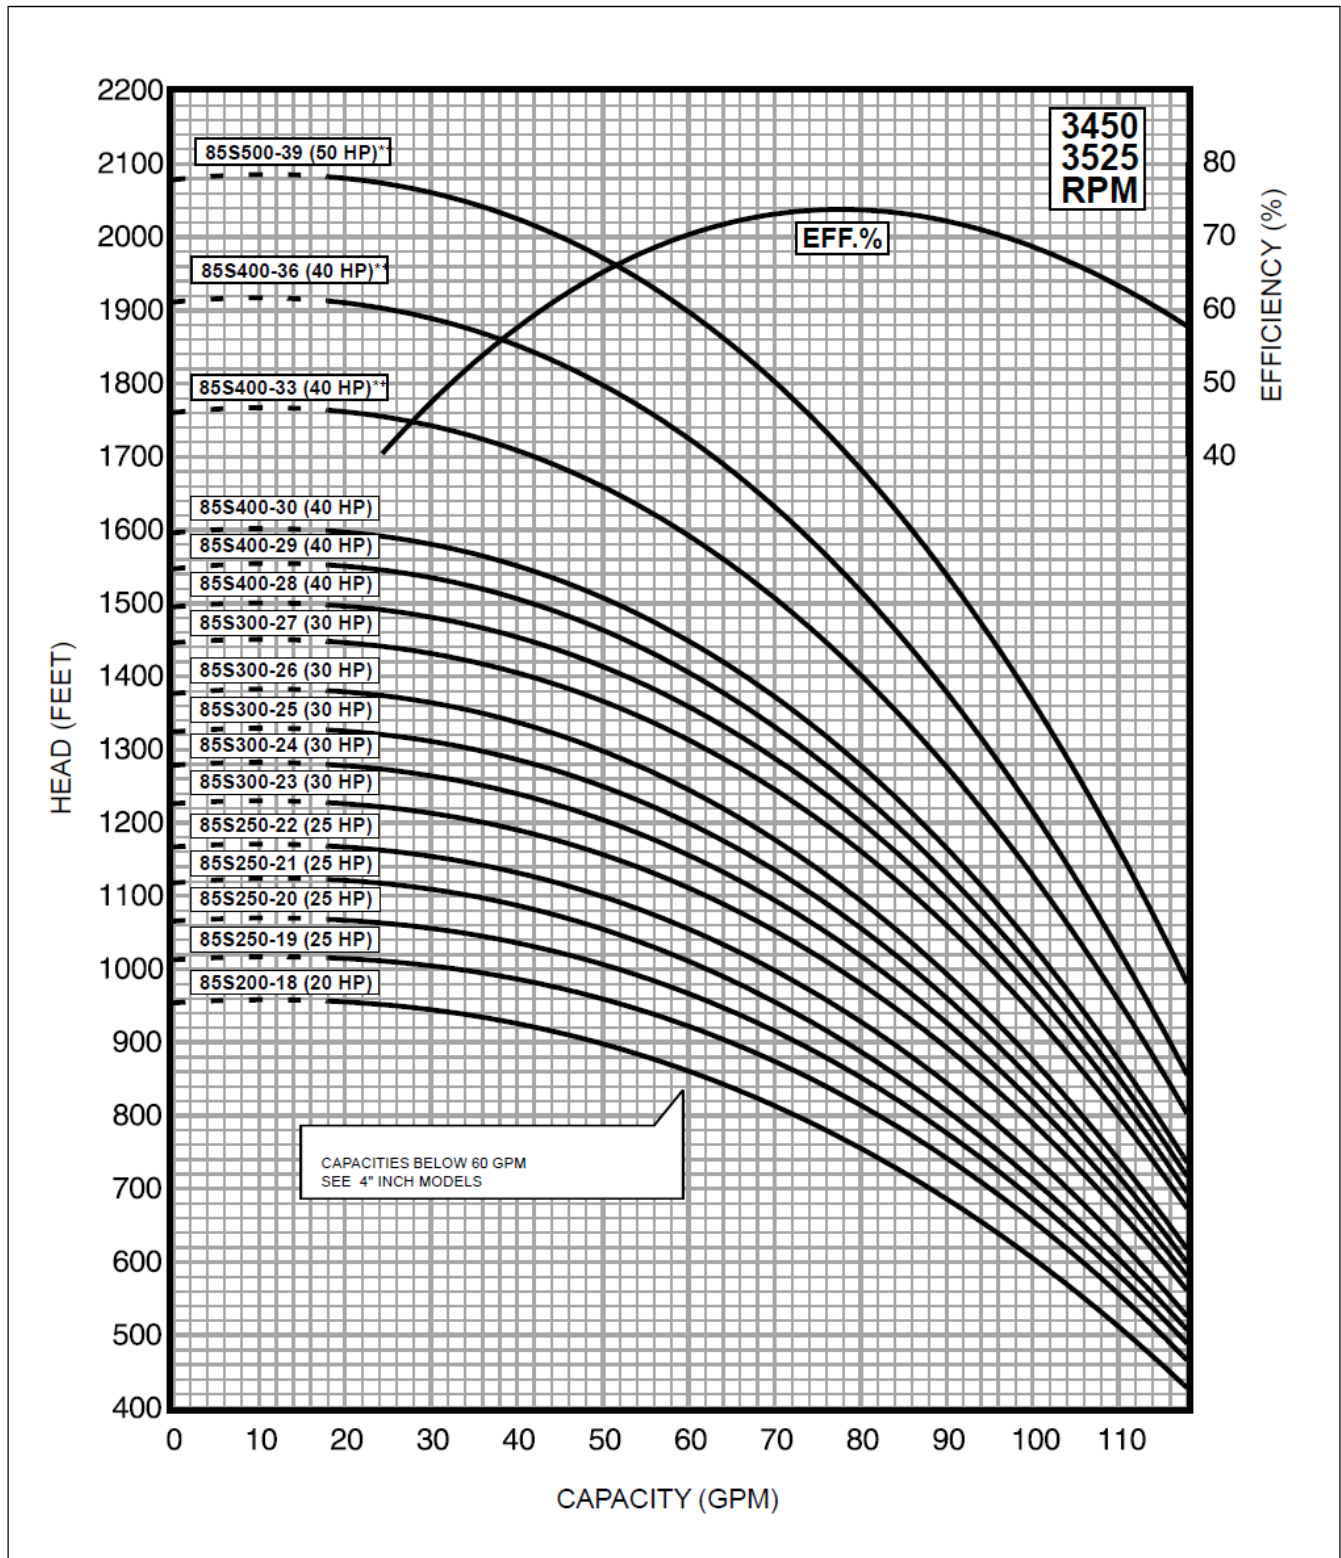

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
* Built into sleeve 3" male NPT discharge/ 8" min. well diameter.
6" MOTOR STANDARD, 7.5-50 HP/3450 RPM.

Performance conforms to ISO 9906, 1999 (E) Annex A
Minimum submergence is 5 feet.

